



RoHS compliant

REV	MODIFICATION	DATE
B1	增加分辨率	2019.07.01

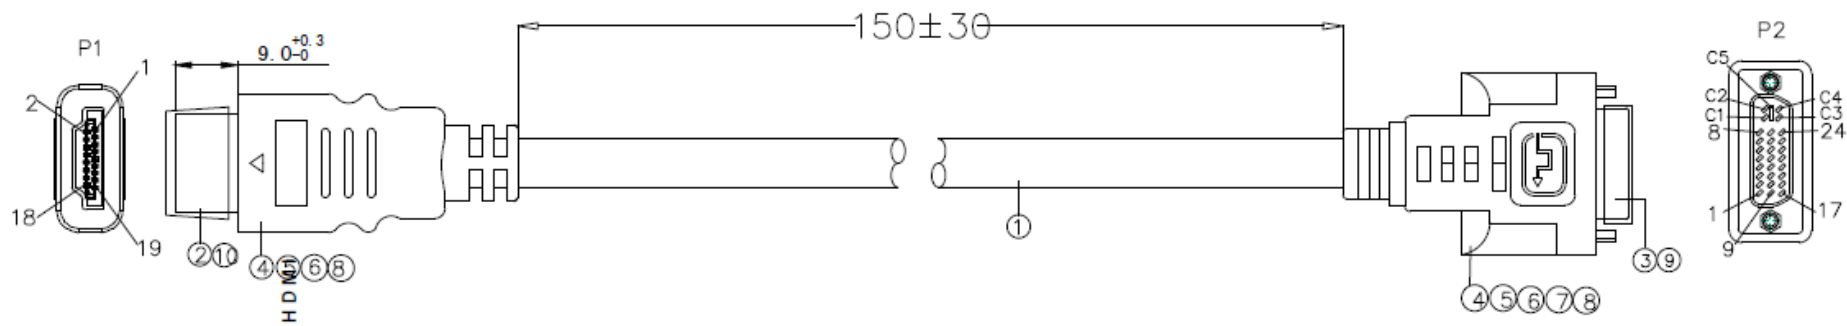

ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
- B.HI-POT: AC 150V 0.01S
- C.INSULATION RESISTANCE:DC300V 0.01S 10M?(MIN)
- D.CONDUCTIVE RESISTANCE:3 OHM (MAX)
- D.DISPLAY RESOLUTION: 1920*1080@60Hz

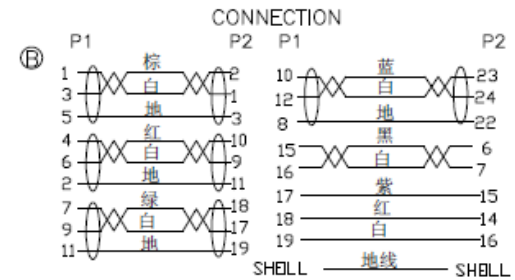

⑩	防尘套	HDMI AM 透明防尘套	1	PCS
⑨	防尘套	DVI M 透明防尘套	1	PCS
⑧	TUBE	∅2.0*7 HEAT SHRINK TUBE	8	PCS
⑦	TUBE	∅0.8*18 HEAT SHRINK TUBE	4	PCS
⑥	TUBE	∅1.0*21 HEAT SHRINK TUBE	1	PCS
⑤	MOLDED	45P BLACK PVC	32	G
④	MOLDED	LD-PE	8	G
③	CONNECTOR	P1:DVI 24+5 PIN FEMALE; 黑胶 PIN 镀金 铁壳镀金+前铆螺母	1	PCS
②	CONNECTOR	P2:HDMI A 19PIN MALE; 黑胶 PIN 镀金 铁壳镀金	1	PCS
①	CABLE	[30#(1/0.254BC)*1P+E(1/0.254BC)+AM]*4+30#(1/0.254BC)*3C+30#(1/0.254BC)*1P+AL-FOIL+DRAIN(1/0.254BC)+BRAID(96/0.12ALM)]BLACK PVC JACKET, OD:8.0±0.2MM 印字: High Speed HDMI® Cable with Ethernet E***** 兄 AWM STYLE 20278 80°C 30V VW-1	230	MM
NO	NAME	SPECIFICATIONS	Q'TY	UNIT

角法	PROJ:	⊕	容忍公差	XX= XXX=	产品名称	HDMI 19P M to DVI
比例	SCALE:	NONE	版本	B	PRODUCT NAME:	24+5 M
单位	UNIT:	MM	页次	1/2	产品料号	DVHDMI15CM
客户回答	SUST APPROVED:		页次	1/2	PART NO:	
核准	APPROVED:		客户		CUST:	
审核	CHECKED:		客户			
制图	QIUCAIMIAO					
DRAWING:	2014.12.20					