

# 3G/HD/SD-SDI to HDMI Converter


## VC480

- The VC480 3G/HD/SD SDI to HDMI Converter provides a professional way to exchange high definition signals in real time. The SDI and HDMI signal conversion is 100% digital and guarantees no loss of quality for both the audio and video transmission. The VC480 is the most dependable way to convert signals with confidence when monitoring in any post or broadcast application.



## Features

- Converts an 3G/HD/SD-SDI input signal to HDMI formats in real time while avoiding transformation loss for both audio and video signals
- Supports additional analog stereo audio and coaxial digital audio
- HDMI (Deep Color)
- LED indication of power and signal status
- Supports an SDI distance of up to 90M (3G-SDI), 150M (HDSDI) or 300M (SD-SDI) of RG6
- Supported SDI formats:
  - SD-SDI (SMPTE 259M, up to 270Mbps)
  - HD-SDI (SMPTE 292M, 296M, up to 1.485Gbps)
  - 3G-SDI (SMPTE 424M, 425M level A,B, up to 2.97Gbps)
- Video Support:
  - 525i@59.96, 625i@50
  - 720p@23.98/24/25/29.94/30/50/59.94/60
  - 1080i@50/59.94/60
  - 1080p@23.97/24/25/29.97/30/50/59.94/60
- Buffered loop-through output provides extended monitoring
- Supports 8 audio channels @48kHz rate
- Features automatic detection of 3G/HD/SD-SDI signals
- Reclocking SDI signals for cascading and thus longer transmission
- Locking power connector for secure communications

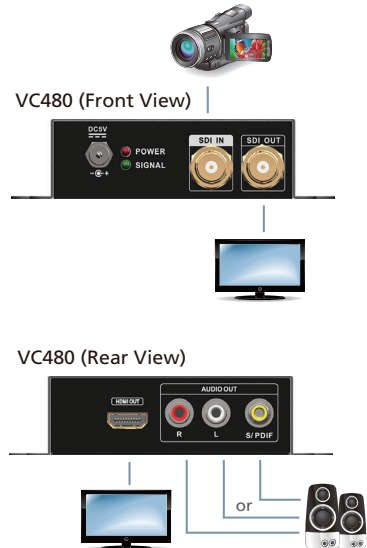

## Specifications

Function	VC480
<b>Video Input</b>	
Interfaces	1 x BNC (Gold)
Impedance	75 Ω
<b>Video Output</b>	
Interfaces	1 x HDMI Type A Female (Black); 1 x BNC (Gold)
Impedance	100 Ω
<b>Video</b>	
Max. Data Rate	2.97 Gbps
Max. Pixel Clock	148.5 MHz
Supported Resolutions	NTSC@59.96 Hz, PAL@50 Hz; 720p@50/59.94/60 Hz; 1080i@50/59.94/60 Hz; 1080p@23.97/24/25/29.97/30/50/59.94/60 Hz
Max. Distance	90m (3G-SDI); 150m (HD-SDI); 300m (SD-SDI)
<b>Audio</b>	
Output	Analog: 2 x RCA (Red/White) Digital: 1 x RCA (Yellow)
<b>SDI Formats</b>	SD-SDI (SMPTE 259M, up to 270 Mbps) HD-SDI (SMPTE 292M, 296M, up to 1.485 Gbps) 3G-SDI (SMPTE 424M, 425M level A, up to 2.97 Gbps)
<b>Connectors</b>	
Power	1 x DC Jack
<b>Power Consumption</b>	DC5V:3.635WBTU
<b>Environmental</b>	
Operating Temperature	0 - 40 °C
Storage Temperature	-20 - 60 °C
Humidity	20 - 90% RH, Non-Condensing
<b>Physical Properties</b>	
Housing	Metal
Weight	0.29 kg
Dimensions (L x W x H)	12.30 x 10.87 x 3.05 cm

Product information is subject to change without prior notice.

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Publish Date: 03/2020 V2.0



© Copyright 2020 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.